


TWIN TIP V2 MANUAL



CALIPER MOUNTING BOLTS BRAKE ADAPTER (FOR LO POSITION ONLY) **GRUB SCREW**



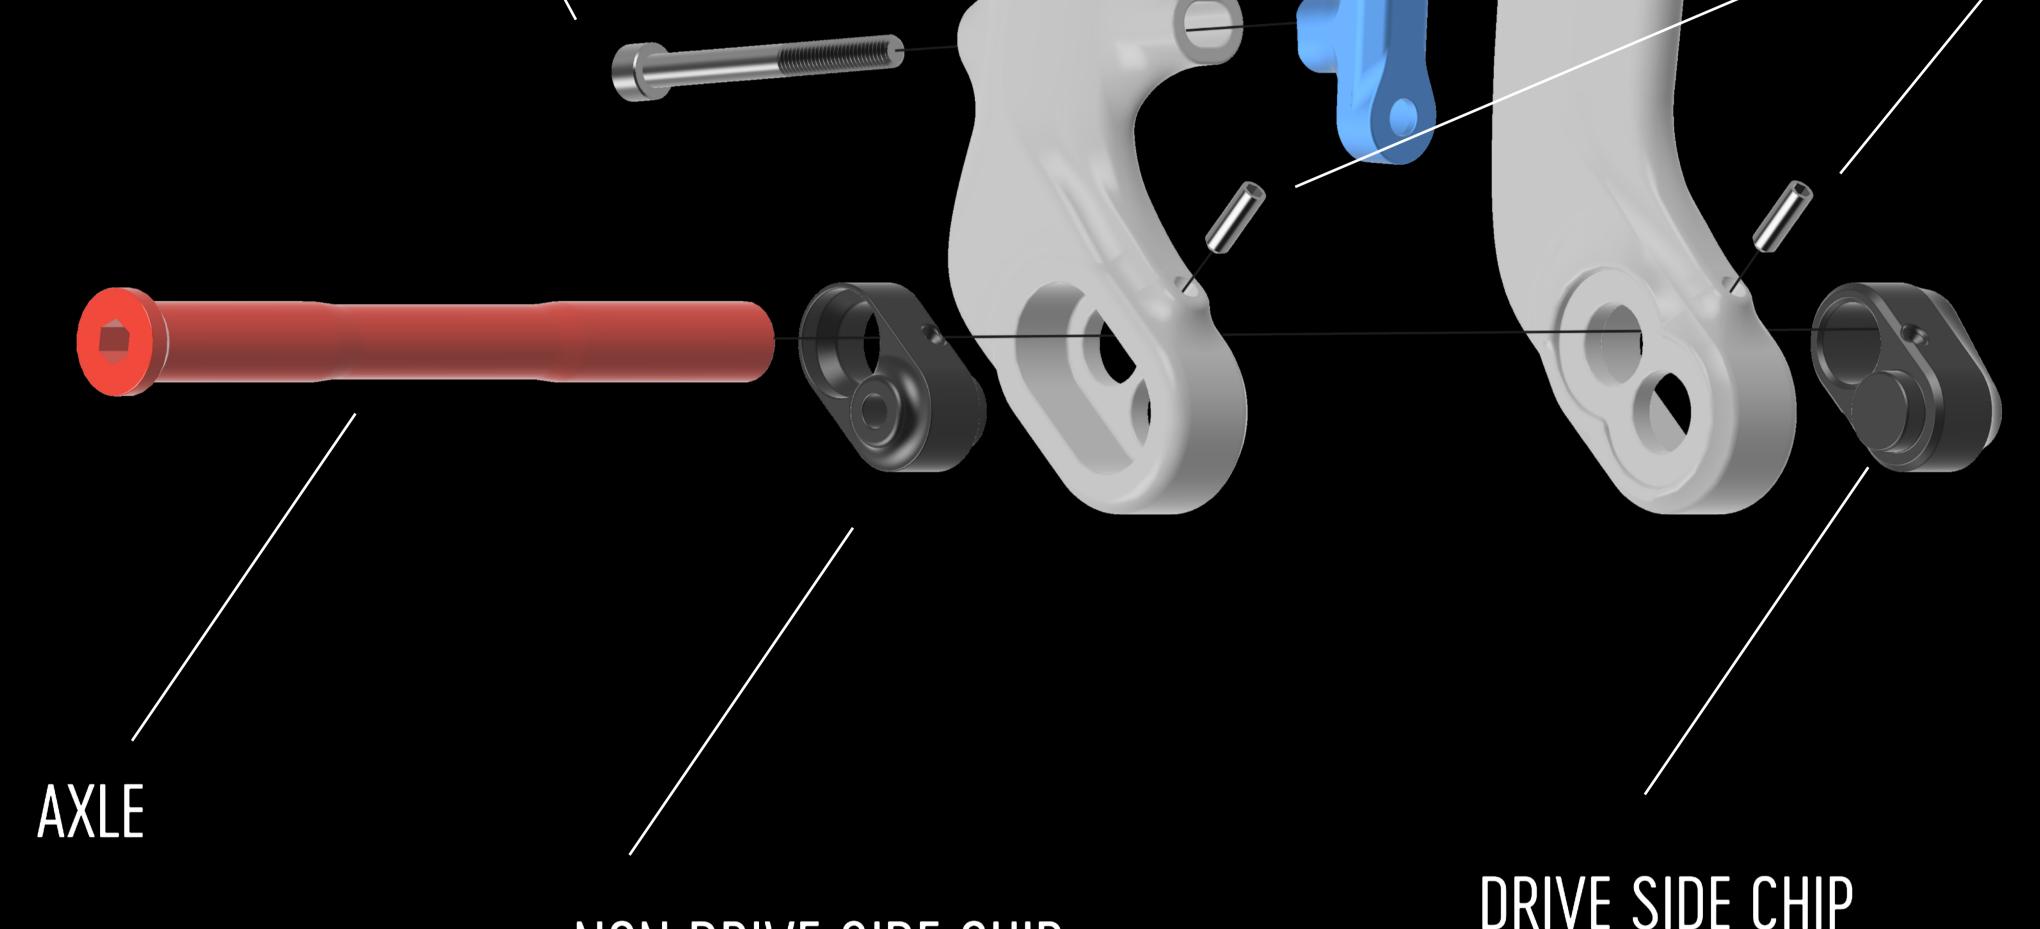


DRIVE SIDE CHIP WITH FENDER MOUNT

TWIN TIP v2 are fitted to Rondo RUUT bikes MY2020 and newer. Features:

12mm through axle

- single-piece TwinTip insert held by a grub screw
- direct flat mount
- lighter weight (550 g with hardware)
- better ride comfort



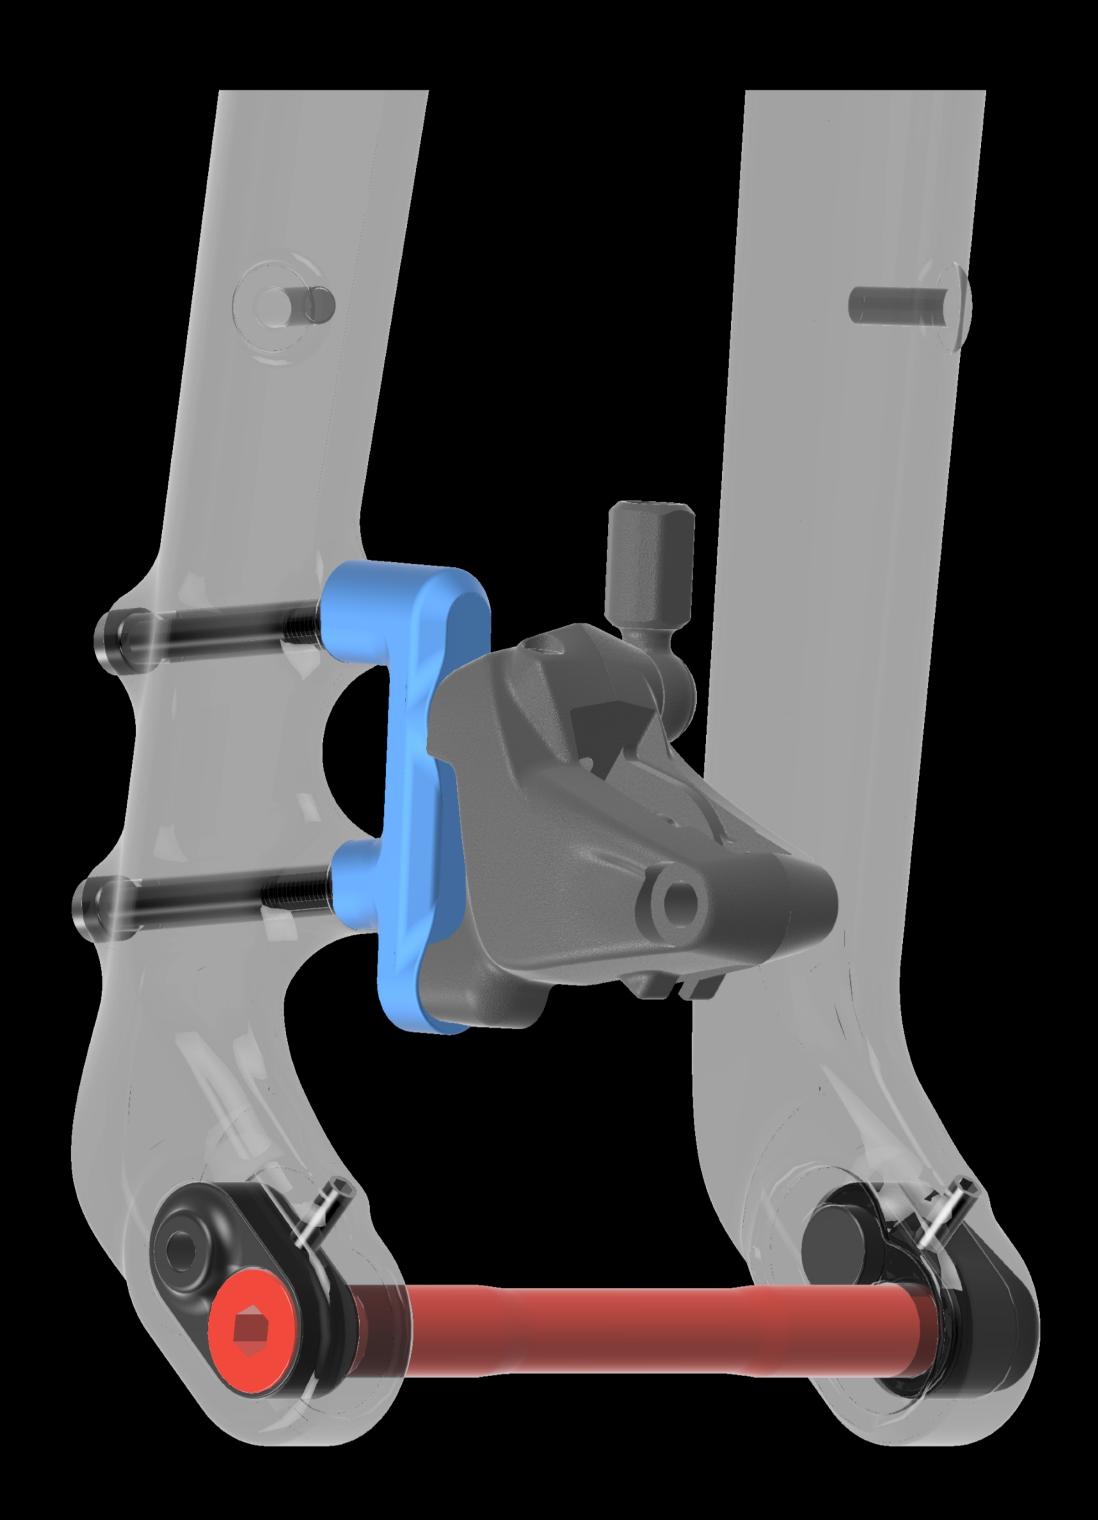




LO position provides 400 mm fork length and 45mm offset Your bike will come from the factory assembled in this position by default.

To change to **HI** position follow the steps: • remove axle with 6mm hex key and remove wheel

- remove caliper mounting bolts with 4mm hex key
- unbolt the brake caliper from the adapter
- loosen the grub screws with 2mm hex key
- push out the TwinTip chips from the inside out



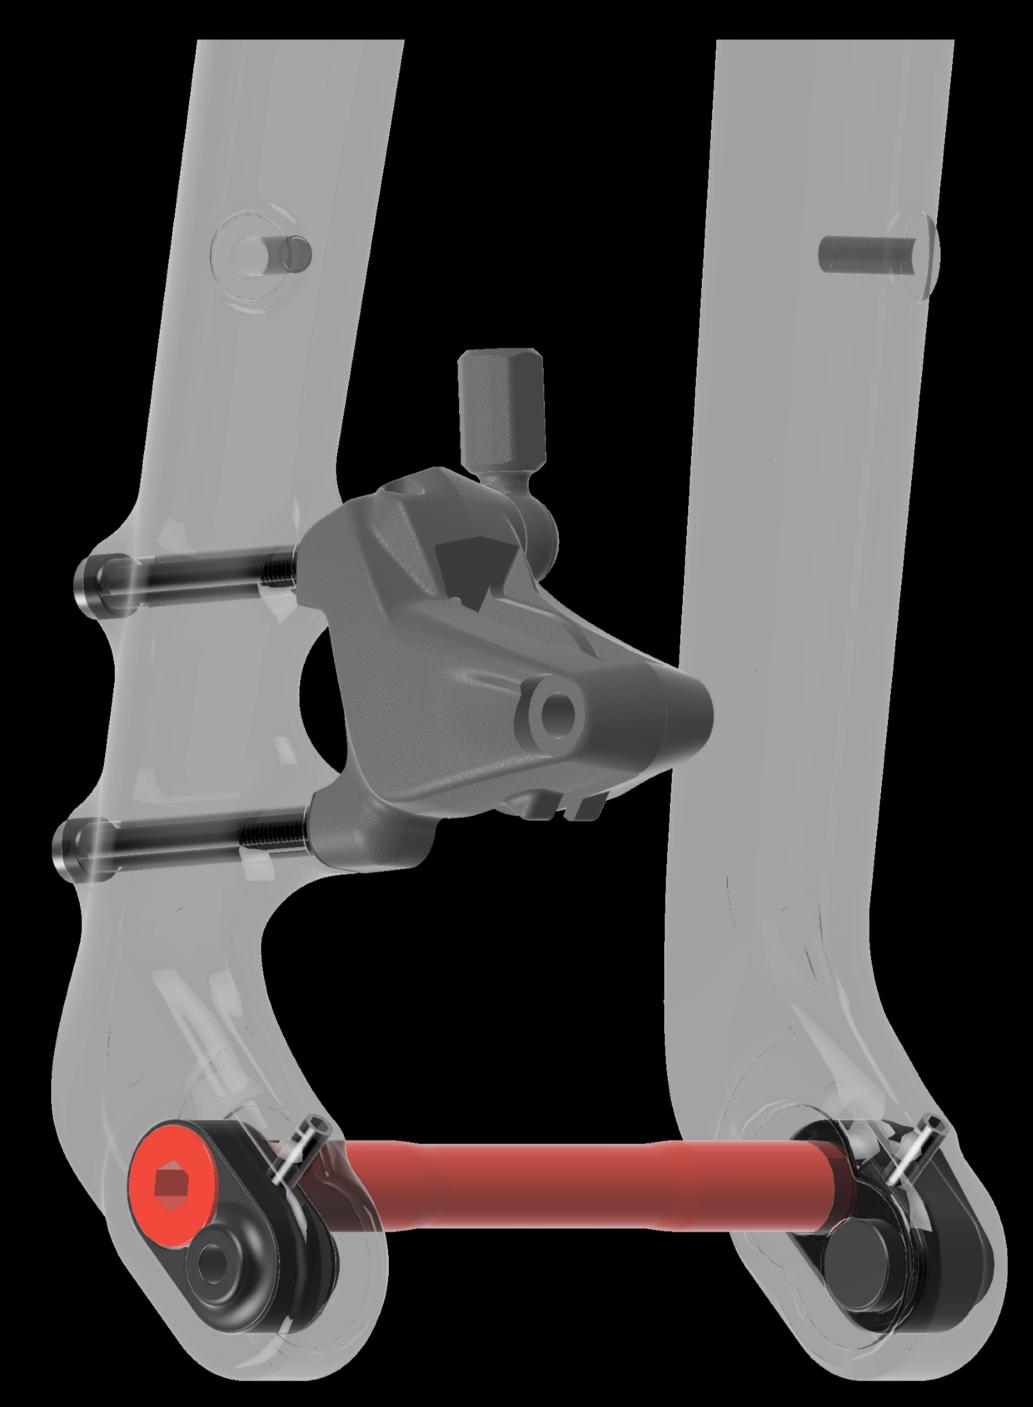

H position gives 390mm effective fork length and 55mm offset

To assemble in **HI** continue with the following steps:

- flip the removed chip 180° and insert back in the fork
- with 2mm hex key tighten carefully the grub screws

- do not overdo it, stop when you feel resistance!
- attach the caliper directly to the fork without the adapter
- re-install wheel and the axle
- finally, adjust the caliper to make sure there is no interference with the rotor

